

RCT-150

15" / HIGH PERFORMANCE /
BEZEL FREE



Feature

- Powerful Intel Core i3/i5 CPU and DDRIII memory up to 8GB
- 15" Bezel free resistive touch panel
- Water spill resistive front bezel
- Small footprint and hidden cable management
- External HDD access for easy maintain
- VESA Wall Mount



Magnetic Card
Reader



External HDD
Access



2x20 VFD or 7"
Display




2nd 12.1 or 15"
Display





Wide Adjustable Angel

RCT-150 System Specifications

I/O Interface

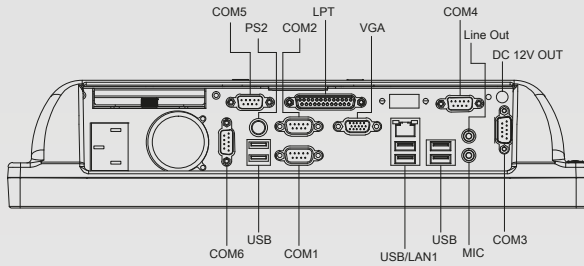

Dimensions

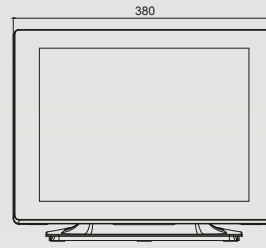

Hardware Specification

CPU	Intel G540 2.5Ghz/2M cache Intel Core i3-3220 3.3Ghz/3M cache Intel Core i5-3550s 3.7Ghz/6M cache
Chipset	Intel® H61 Chipset
System Memory	2GB Standard, Maximum 8G (204-pin DDR3 SO-DIMM x 2)
Audio	Realtek ALC892 HD Audio
Display	15" TFT-LCD /1024 X 768 Touch Screen: Bezel Free 5-wired resistive
Storage	1x 2.5" SATA II HDD/SSD
Color	Black
Power supply	250W PSU

External I/O Ports

USB 2.0	6
COM port	2 x DB-9(no power), optional 4 x DB-9 with RI/5V/12V power selectable
VGA	1
PS2	1 x K/M COMBO
Parallel	1
LAN	1 x 10/100/1000Mbps
Audio I/O	2 ; MIC and Line-out

Expansion Slot

PCI-E Slot	1
Mini PCIe socket	1

Optional Peripherals

MSR	3 Tracks , JIS-I or II
2-in-1 Reader	MSR+i-Button
Customer Display	2 x 20 VFD/ 4 line 7" colourful VFD
2nd Display	7"/10"/15" with optional 12V DC out from Main Board
Wireless LAN	802.11 b/g mini-PCIe wireless module

OS Support

Windows	POSReady 2009,win XP,POSReady 7,Win 7
Linux	Per Request

Environment

Green Product	RoHs,REACH
EMI/Safety	CE CLASS A,FCC Part 15 Subpart B,CLASS A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Relative Humidity	10% ~ 90% (Non-Condensing)

Dimension

Dimension	380(W) x 217(D) x 311(H) mm
Weight	5.8kg

Product specifications are subject to change without prior notice.



Netronix, Inc. (Headquarter)

No 945, Boai St, Jubei City, Hsinchu, Taiwan, 30265 R.O.C.
TEL:+886-2-2912-0211 FAX:+886-2-2912-1311
E-mail:pos_sales@netronixinc.com