

# RDT150-JF



15" FANLESS/  
TRUE FLAT SCREEN



## Features

- Fanless design for quiet operation
- 15" True flat screen resistive touch panel
- Intel Celeron J1900 CPU and DDR3 memory up to 8GB
- Rich I/O support
- Spillage proof front bezel
- Small footprint and hidden cable management
- Easy access removable HDD bay
- VESA wall mountable



Magnetic Card Reader



Easy Access HDD Bay



2x20 VFD Display




2nd 7" or 10" Display



Wide Adjustment Angle

# RDT150JF System Specifications

## Dimensions

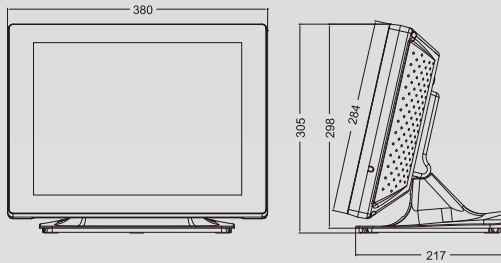

### Hardware Specification

CPU	Intel® Celeron® Processor J1900 (Clockspeed: 2.0 GHz, Turbo Speed: 2.4 GHz, Cores: 4)
System Memory	4GB Standard, Maximum 8G (DDR3L SO-DIMM socket x 2)
Graphics	Intel® Gen7 Intel® Graphics DX 11, OGL3.2
Audio	Realtek ALC662 HD Audio
Display	15" LED-LCD /1024 X 768 (LED backlight) Touch Screen:15" 5-wired resistive touch
Storage	1x 2.5" SATA II HDD/SSD
Color	Black
Power Supply	80W(12V/6.6A) power adapter

### External I/O Ports

USB	6 (4 x USB 3.0, 2 x USB 2.0)
COM port	4 x DB-9 with 5V/12V power selectable
VGA	1
LAN	1 x 10/100/1000Mbps
Parallel	1
Audio I/O	2 ; MIC and Line-out
Cash drawer	1 x RJ-11 (12V/24V)

### Optional Peripherals

MSR	3 Tracks
Customer Display	2 x 20 VFD
2nd Display	7"/10" Second Display

### OS Support

Windows	POSReady 7 , Win 7 , Win8 , Win 8.1
Linux	Per Request

### Environment

Green Product	RoHs,REACH
EMI/Safety	CE, FCC Class A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Relative Humidity	10% ~ 90% (Non-Condensing)

### Dimension

Dimension	380(W) x 217(D) x 306(H) mm
Weight	5.3kg

### Other

Indicator	Power LED, HDD LED
Button	Power on/off , Reset
Buzzer	Yes

Product specifications are subject to change without prior notice.



## TEAMSable POS

1911 Hartog Dr. San Jose, CA, 95131  
 TEL: 408-452-8788 FAX: 408-452-9788  
 E-mail: sales@teamresearchinc.com  
 Website: www.teamsable.com