



## SKY-15S 15" WINDOWS TERMINAL



## 15" ALL-IN-ONE POS SYSTEM

*15" All in One Fanless Terminal*

TEAMSable All in One Touch Terminals, Models SKY-15S-i3, and SKY-15S-J1900 are perfect as either a server or client machine. It comes with Intel Core i3/i5 CPU or J1900 Quad Core 2.0 CPU to keep up with daily usage demands. Complemented not only with its modern look and design, the SKY-15S also has standard 4GB RAM, EZ-Access SSD storage, spill resistant zero bezel design, popular OS configuration choices, and a 3 year warranty with free tech support and a complimentary 90 day overnight rapid replacement with call tag program from date of purchase. You can't go wrong with the TEAMSable SKY-15S.

## PERIPHERAL OPTIONS



MSR Reader  
(Hardware key-injectable)



MSR/EMV  
Combo Reader



Integrated  
2x20 Line Display



Integrated 10"  
Customer Display



[www.teamsable.com](http://www.teamsable.com)


1911 Hartog Dr. San Jose, CA 95131

1-408-452-8788

[sales@teamresearchinc.com](mailto:sales@teamresearchinc.com)

# SKY-15S Terminal

- 15" LED Display
- Bezel-Free, PCAP Multi-Touch
- EZ-Access SSD Storage
- Optional Integrated MSR reader
- Optional Integrated MSR/EMV reader
- 3 Years Warranty

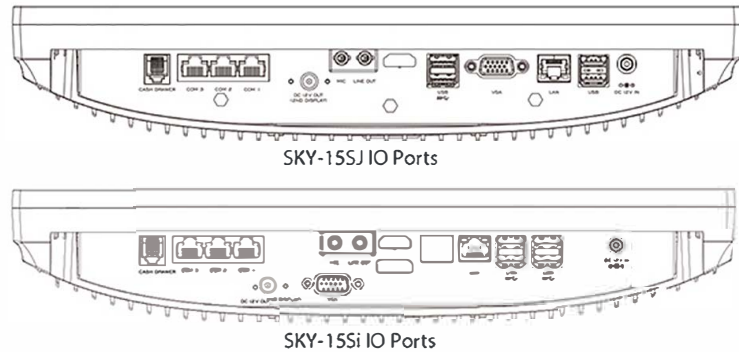

	SKY-15Si	SKY-15SJ
<b>Hardware</b>		
Display	15" LED Panel	15" LED Panel
Resolution	1024x768	1024x768
Brightness	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>
Touch Technology	10 Point Capacitive	10 Point Capacitive
CPU	i3 6100TE 2.7Ghz i5 6500TE 3.3Ghz	Intel J1900 Quad Core 2.0GHz
Memory	4GB Standard (32GB upgradable)	4GB Standard (8GB upgradable)
Storage	120GB SSD Standard (256GB SSD upgradable)	120GB SSD Standard (256GB SSD upgradable)
Power Supply	96W(12V/8A) External	96W(12V/8A) External
<b>External Ports</b>		
USB	6 x USB (USB 3.0x4, USB 2.0x2)	6 x USB (USB 3.0x4, USB 2.0x2)
COM	3	3
VGA	1	1
Ethernet	1 x 10/100/1000 Mbps	1 x 10/100/1000 Mbps
Audio I/O	1 x MIC in and 1x Line-out	1 x MIC in and 1x Line-out
Cash Drawer	1 x RJ11	1 x RJ11
<b>Optional Peripherals</b>		
MSR	3 Tracks (Hardware key injectable)	3 Tracks (Hardware key injectable)
MSR+EMV	Available	Available
Line Display	2x20 Line Display	2x20 Line Display
2nd Display	10" Customer Display	10" Customer Display
OS Support	Win 10 Pro, Win 10 IOT 64Bit	Win 10 IOT 64Bit
<b>Environment</b>		
Operating Temperature	0 - 35°C (32 - 94°F)	0 - 35°C (32 - 94°F)
Storage Temperature	-10 - 55°C (14 - 131°F)	-10 - 55°C (14 - 131°F)
Relative Humidity	10% - 90% (Non-Condensing)	10% - 90% (Non-Condensing)
Certification	RoHS, REACH, ISO9002	RoHS, REACH, ISO9002
<b>Package</b>		
Dimension	349.6(W)x348.7(H)x225.0(D)	349.6(W)x348.7(H)x225.0(D)
Weight	6.44kg	6.44kg