



SEA-LPT150

SEA-LPT150 SERIES WINDOWS TERMINAL



SEA-LPT150 POS SYSTEM

Compact and Versatile POS Solution

The SEA-Series desktop all-in-one touch terminal is the latest generation to TEAM Sable's pedigree line of POS systems. This machine offers the perfect combination of form, function and value. Its Intel J6412 CPU is up to four times faster than the Intel J1900. An innovative onboard touch utility application allows the user to alternate from resistive to capacitive touch for optimum performance in various environments. The SEA-Series also boasts a sleek, modern look with an advanced fanless design to ensure maximum runtime in the harshest of conditions. Other upgrades to this unit are HDMI port, Linux OS compatibility, and a high resolution LED panel.

No matter the application, the SEA-Series will provide best-in-class performance, minimum downtime with superior after sales support, and a maximum return on investment.

Contact us today to learn more about this industry-leading POS system.



Integrated
PCI MSR



Integrated
2nd Monitor




Integrated
2x20 Display

☎ 408-775-8384

✉ sales@teamsable.com

🌐 www.teamsable.com


📍 1911 Hartog Dr. San Jose, CA 95131

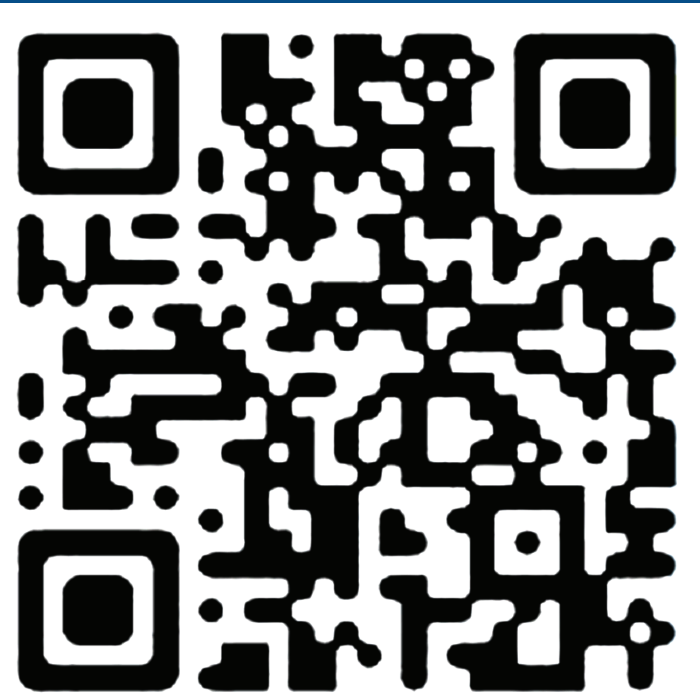

SEA-LPT150 Series Windows Terminal

- 15” LED Panel
- Zero-Bezel, PCAP Touchscreen
- Splash Resistant Screen
- 3 Years Warranty with Free Tech Support

SPECIFICATION

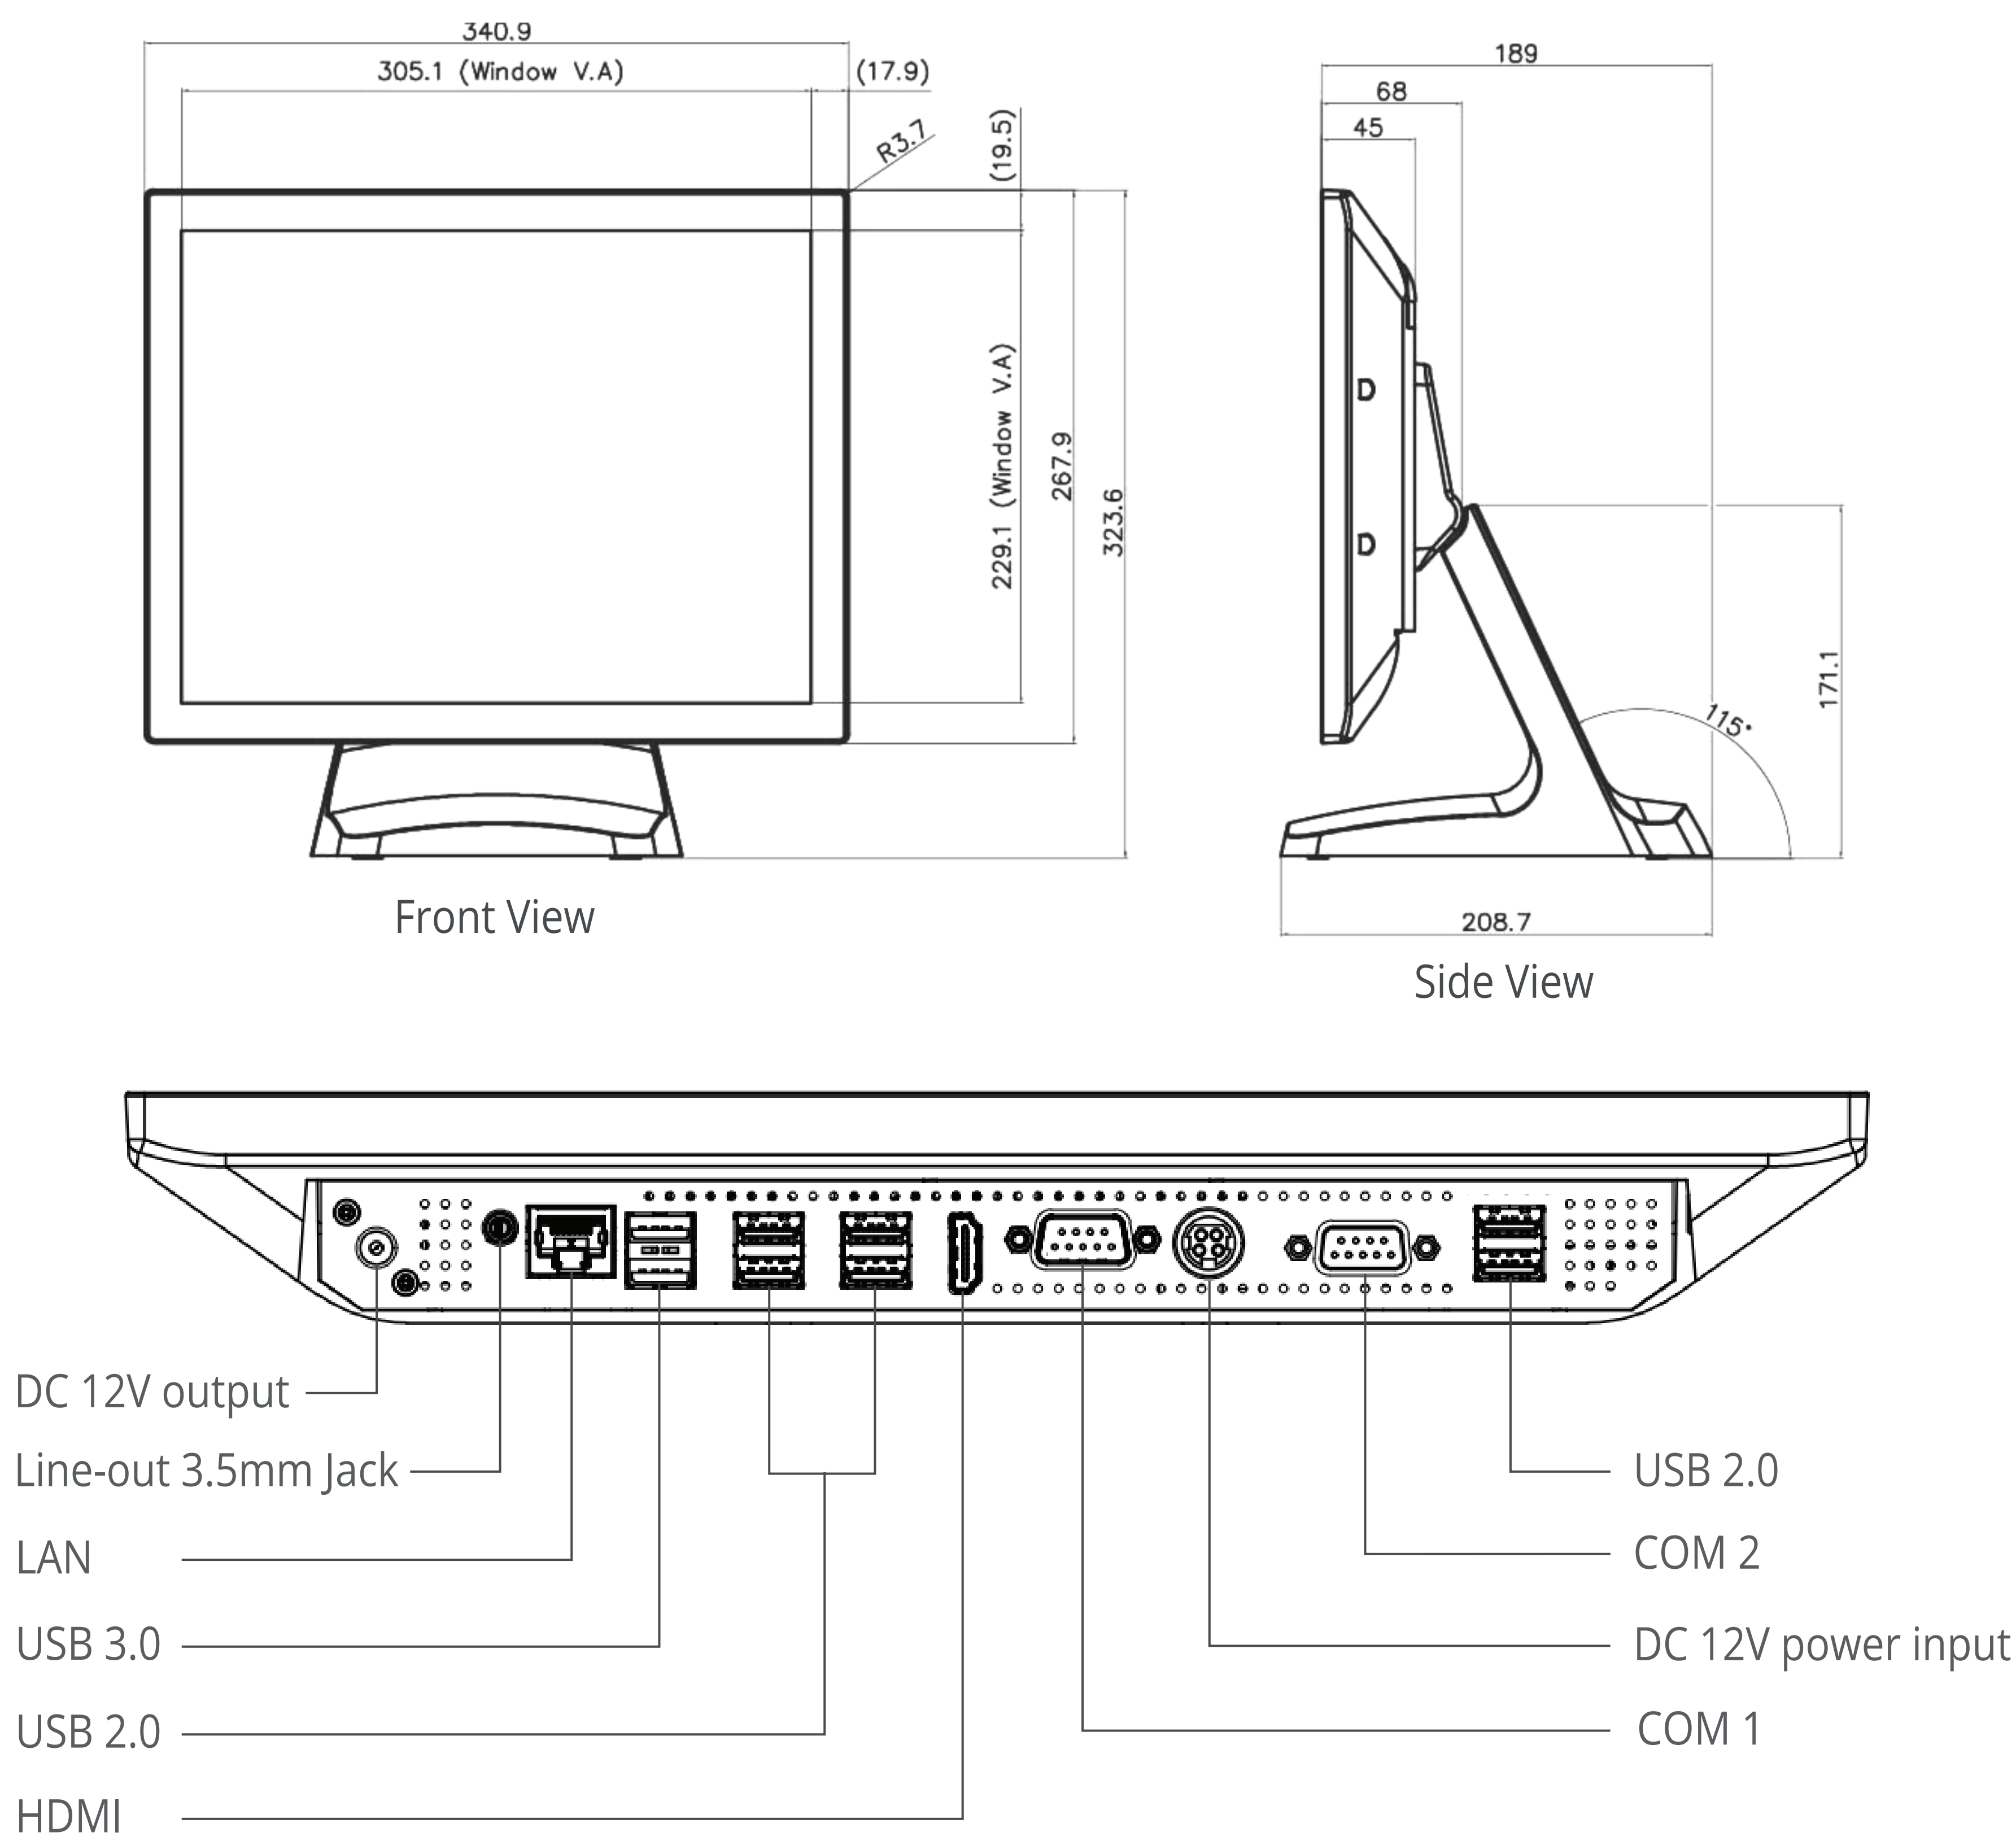

| | LPT150- J | LPT150- i3 | LPT150- i5 |
|-------------------------|------------------------------------|------------------------------------|------------------------------------|
| Hardware Specification | | | |
| Display | 15" LED Panel | 15" LED Panel | 15" LED Panel |
| Resolution | 1024x768 | 1024x768 | 1024x768 |
| Touch Technology | 10 Point Capacitive | 10 Point Capacitive | 10 Point Capacitive |
| CPU | Intel®Celeron J6412 @ 2.0Ghz | i3-1115G4 @ 3.0Ghz | i5-1135G7 @ 2.4Ghz |
| Memory | 4GB and 8GB DDR4 RAM | 4GB and 8GB DDR4 RAM | 4GB and 8GB DDR4 RAM |
| Internal Storage | 120 / 240 GB | 120 / 240 GB | 120 / 240 GB |
| OS | Win 10 IOT, Win 10 Pro 64 Bit | Win 10 IOT, Win 10 Pro 64 Bit | Win 10 IOT, Win 10 Pro 64 Bit |
| External Ports | | | |
| USB | 8 x USB (4 x USB3.0, 4x USB 2.0) | 8 x USB (4 x USB3.0, 4x USB 2.0) | 8 x USB (4 x USB3.0, 4x USB 2.0) |
| COM | 2 x RS232 | 2 x RS232 | 2 x RS232 |
| VGA | NO | NO | NO |
| HDMI | 1 | 1 | 1 |
| Ethernet | 1 x 10/100/1000 Mbps | 1 x 10/100/1000 Mbps | 1 x 10/100/1000 Mbps |
| Audio I/O | 1 x MIC in and 1x Line-out | 1 x MIC in and 1x Line-out | 1 x MIC in and 1x Line-out |
| Cash Drawer | NO | NO | NO |
| DC 12V Power Input | 1 x 2.5mm | 1 x 2.5mm | 1 x 2.5mm |
| Operational Peripherals | | | |
| MSR | 3 Tracks (Hardware key injectable) | 3 Tracks (Hardware key injectable) | 3 Tracks (Hardware key injectable) |
| MSR+EMV | Available | Available | Available |
| Line Display | 2x20 Line Display | 2x20 Line Display | 2x20 Line Display |
| 2nd Display | 10" Customer Touch Display | 10" Customer Touch Display | 10" Customer Touch Display |
| Environment | | | |
| Operating Temperature | 0 - 35 C° (32 - 94 F°) | 0 - 35 C° (32 - 94 F°) | 0 - 35 C° (32 - 94 F°) |
| Relative Humidity | 10% - 90% (Non-Condensing) | 10% - 90% (Non-Condensing) | 10% - 90% (Non-Condensing) |
| Certification | RoHS, REACH, ISO9002 | RoHS, REACH, ISO9002 | RoHS, REACH, ISO9002 |
| Package | | | |
| Dimension | 17" (L) x 13" (W) x 17" (H) | 17" (L) x 13" (W) x 17" (H) | 17" (L) x 13" (W) x 17" (H) |
| Weight | 13 lbs. | 13 lbs. | 13 lbs. |