



15N

15.6" ANDROID TERMINAL



15.6" ANDROID POS SYSTEM

15.6" All in One Fanless Terminal

The TEAMSable 15N Android POS terminal is the newest addition to our innovative line of advanced Android based POS products.

The RM and RMX Series are packed with features and come in a sleek contemporary housing that would go well with any POS system installation.

Its 1080P resolution PCAP touchscreen and blazing-fast Quad-Core and Six-Core CPUs, can handle even the most demanding applications.

The RM and RMX Series are a wise choice for a low-cost, high-performance POS terminal that enhances any business and offers outstanding functionality.



Integrated MSR
Reader



Integrated Scanner



Integrated Payment
Device

408-775-8384

sales@teamsable.com

www.teamsable.com


1911 Hartog Dr. San Jose, CA 95131




15N Android Terminal

- 15.6 " LED Panel
- 1080P PCAP Zero Bezel Touchscreen
- Splash Resistant Screen
- 1 Year Warranty with Free Tech Support

RM

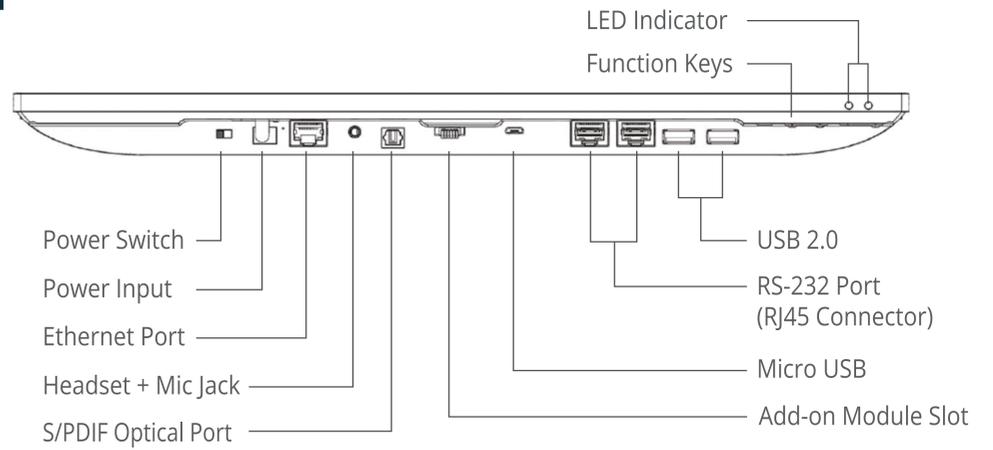

RMX

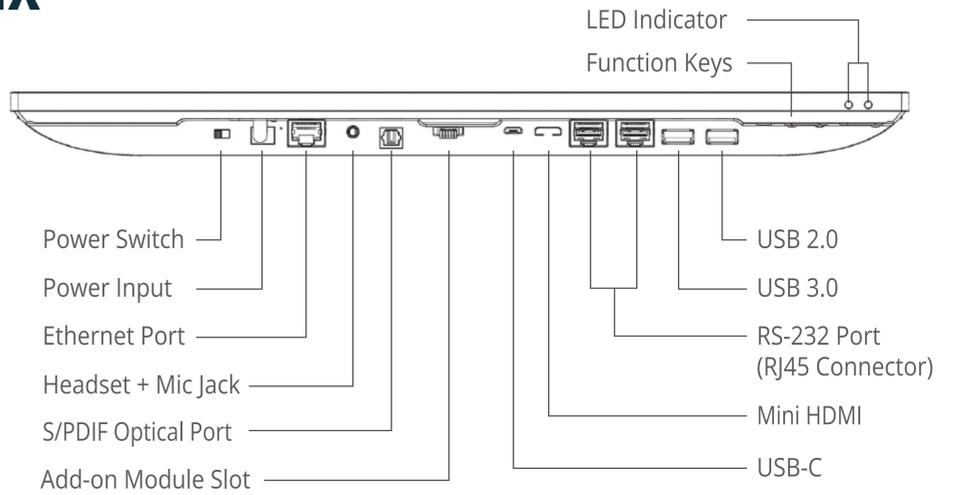

	15N- RM	15N- RMX
Hardware Specification		
Display	15.6" LED Panel	15.6" LED Panel
Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)
Touch Technology	10 Point Capacitive	10 Point Capacitive
CPU	Cortex A17	Cortex 72 + Cortex 53
Memory	2GB	4GB
Internal Storage	8GB	16GB
OS	Android 9.0	Android 9.0
Power Supply	12V/2A AC/DC Adapter	12V/2A AC/DC Adapter
Wi-Fi	802.11 b/g/n/ac	802.11 b/g/n/ac
Bluetooth	BT 4.2	BT 4.2
External Ports		
USB	USB 2.0 x 5, Micro USB 2.0 x 1	USB 2.0 x 4, USB 3.0 x 1, USB-C x 1
Display Port	N/A	Mini HDMI
COM	RS-232 x 2 (in RJ45 connector form)	RS-232 x 2 (in RJ45 connector form)
Ethernet	10/100/1000 Mbps LAN RJ45 x 1	10/100/1000 Mbps LAN RJ45 x 1
Audio I/O	Headset + Microphone Jack x 1, S/PDIF Optical Port x 1	Headset + Microphone Jack x 1, S/PDIF Optical Port x 1
Camera	Front facing 2M pixels (optional)	Front facing 2M pixels (optional)
Operational Peripherals		
MSR	Available	Available
Scanner	Available	Available
Payment Device	Available	Available
Environment		
Operating Temperature	0 - 35 C° (32 - 94 F°)	0 - 35 C° (32 - 94 F°)
Storage Temperature	-10 - 55 C° (14 - 131 F°)	-10 - 55 C° (14 - 131 F°)
Relative Humidity	10% - 90% (Non-Condensing)	10% - 90% (Non-Condensing)
Certification	CE, FCC, RoHS, ISO 9002	CE, FCC, RoHS, ISO 9003
Package		
Dimension	18.75" (L) x 8.75" (W) x 15.5" (H)	18.75" (L) x 8.75" (W) x 15.5" (H)
Weight	9 lbs.	9 lbs.