



SNBC Printer OPOS Driver Notes


1. Run SetUp.exe to load the driver.
2. After the driver is loaded, choose **Start/Program Files/BYOPOS** to start the utility.
3. The screen opens:

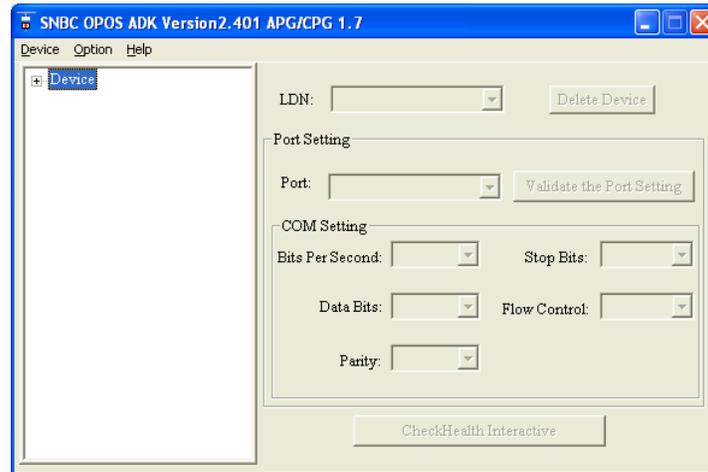


4. With the Utility open you can select **Device** from the menu bar to add a printer or cash drawer. Select **Add Printer...**

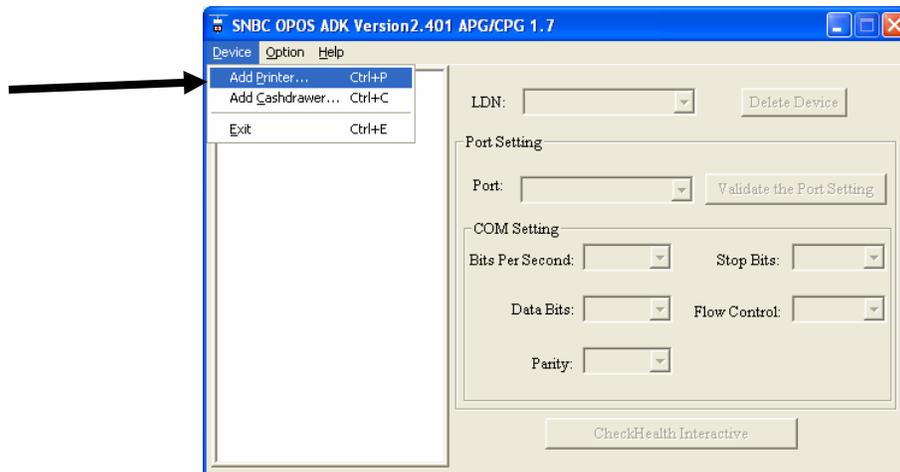

5. Click the *Select Prints* drop-down box to select your printer.

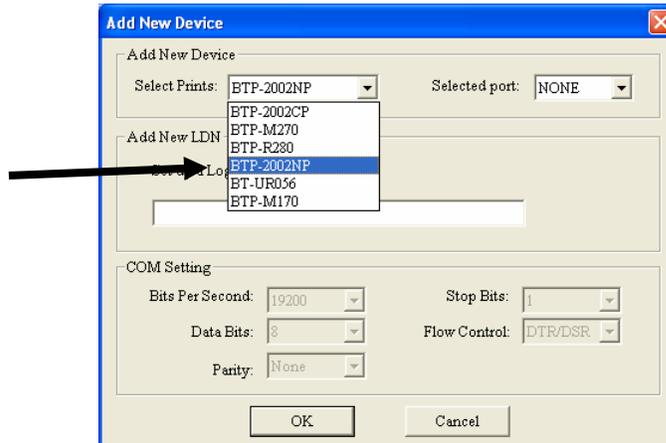

6. Click the *Selected Port* drop-down: to choose the port the printer will connect to.
7. If installing on a serial port be sure to set the correct COM Settings.

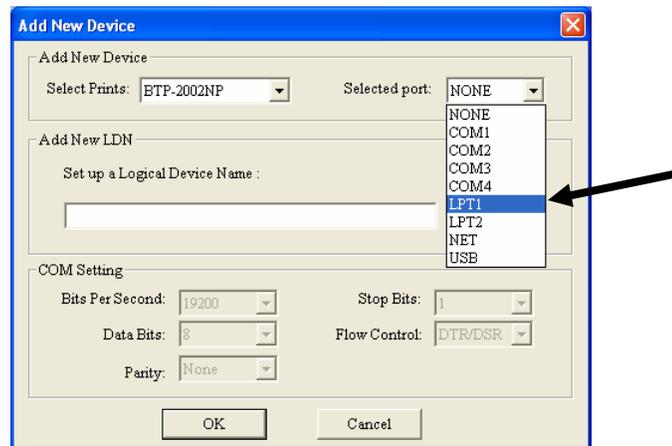


Note: For correct operation, be sure there is no other device set to use the same port that you setup for the OPOS Printer.


8. Enter a “Set up a Logical Device Name”:




9. Click **OK**. After you have added your printer(s) you will be able to see them in the POS Printer list.

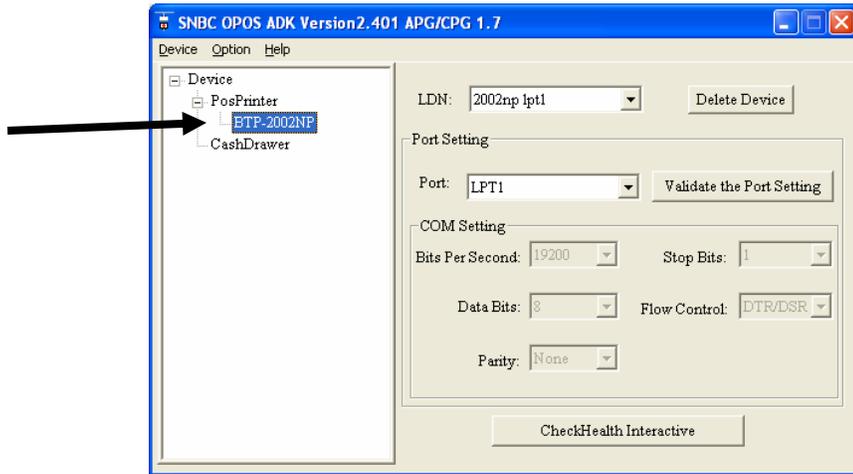


10. Click the **CheckHealth Interactive** button.

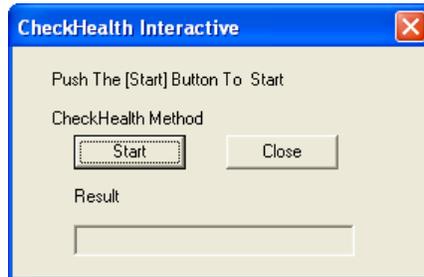

11. Click **Start**. Look for the result: **OPOS_SUCCESS**. Press **Cancel** to finish.

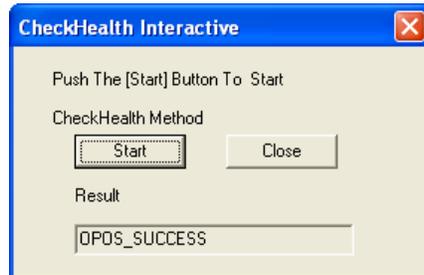


12. Adding a Cash Drawer is similar. Select **Add Cash drawer** from drop-down.

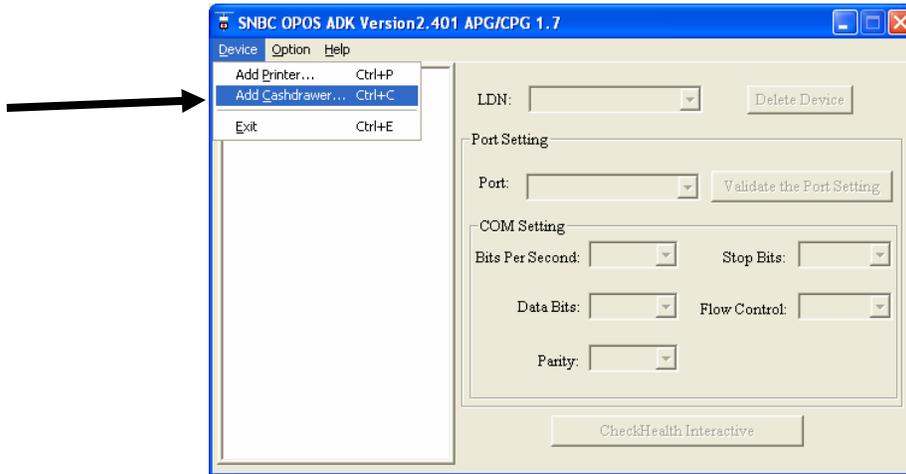

13. Select the printer to kick the drawer from and give the drawer a Logical Device Name.



14. Click **OK**.

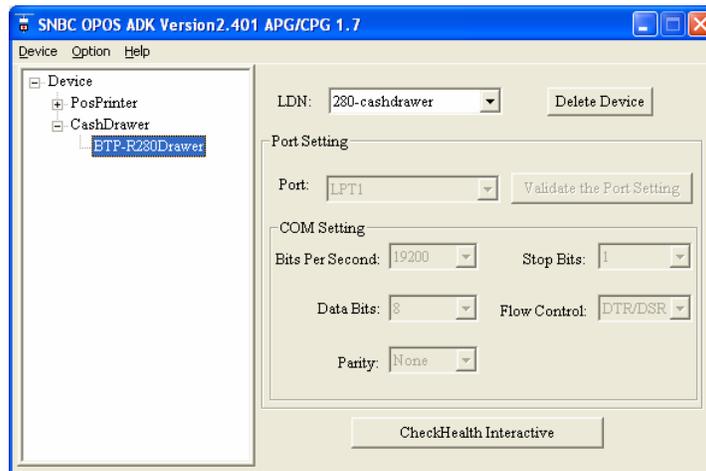

15. Click the **CheckHealth Interactive** button



16. Click **Start**



17. Click **Start**. Look for the result: **OPOS_SUCCESS**. Press **Cancel** to finish.